




Booster System

Energy Saving: 30% - 50%
Energy Consumption: 30% Down
Max Suction Distance: 9m

- 🛡️ Multi-protection
- 🌀 Permanent Magnet Motor
- 🔗 Integrated Design
- ⚙️ Constant Pressure
- 📺 LCD Display Screen
- ⚙️ Adjustable Pressure
- 🚰 High Flow Rate
- 💡 Energy Saving
- 🔌 Wider Range of Voltage
- 🔊 Low Noise



PM-C

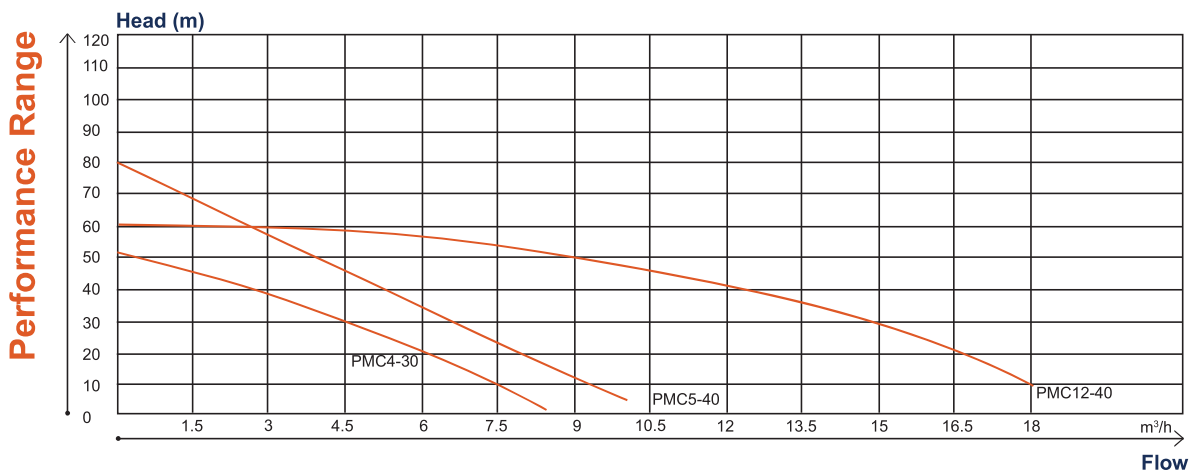

Technical Data

Model	Power Range (Kw)	Max. Head (m)	Rated Head (m)	Max. Flow (m³/h)	Rated Head (m³/h)	Max. Speed (rpm)	Voltage (v)	Frequency (Hz)	Inlet&Outlet (inch)
PMC4-30	0.9Kw	50	30	8	4	4000	220±20%	50/60	1¼" 1"
PMC5-40	1.1Kw	80	40	8	5	5000	220±20%	50/60	1¼" 1"
PMC12-40	2.2Kw	60	40	18	12	4500	220±20%	50/60	2" 1/2"